

SASH REMOVAL AND REPLACEMENT OF A 3200 / 1200 SERIES SINGLE HUNG

REMOVAL:



Locate take out clip in the side jamb of the window**




Pull take out clip out from jamb at bottom of clip (both sides)




Take out clip view after pulling out from jamb



Unlock window and raise sash up past take out clips

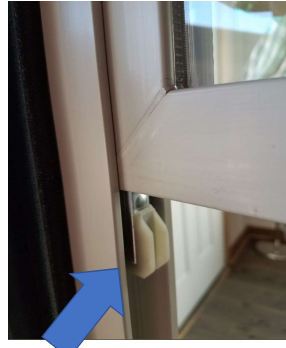

The balancer shoe should now be somewhat exposed

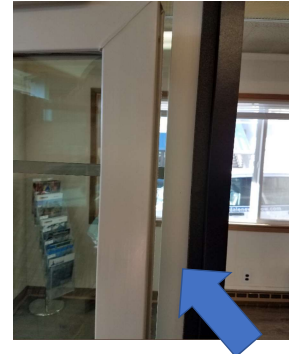

Push the sash in against one jamb allowing clearance for the other side



Swing the gap side of the window out and remove the sash



When replacing the sash, be sure to set the sash above the balance shoe

REPLACEMENT:

Once you have replaced the sash, close and lock it and then push take-out clips back in.

** Depending on sash and window height, you may need to first remove the filler bar:

